




HERO LVT 5MM THICKNESS TESTING DATA

TECHICAL DATA	ASTM	5mm
Electrostatic Propensity of Carpets	AATC 134	Max Avg: 1.7kv Negative
Critical Radiant Flux	ASTM E648	Class 1
Smoke Density	ASTM E662	Passes < 450
Flexibility of Resilient Flooring Materials	ASTM F137	Passes 15.0 mm Mandrel
Dimensional Stability of Resilient Flooring after Exposure to Heat	ASTM F2199	0.009 inch per 12" length 0.007 inch per 12" width
Thickness of Resilient Flooring Materials Having Flat Surfaces	ASTM F386	0.205"
Short Term Indentation & Residual Indentation of Resilient Flooring	ASTM F1914	0.004"
Dynamic Coefficient of Friction of Hard Surface Floors	ANSI B101.3	DCOF 0.47
Static Load Limit 3,000 psi	ASTM F970	0.015"
Static Load Limit 2,000 psi	ASTM F970	0.011"
Static Load Limit 1,000 psi	ASTM F970	0.005"
Resistance to Chemicals of Resilient Flooring	ASTM F925	Chemical & Stain Resistance Superior Performance
Heavy Metal Content Analysis	ASTM F963	Clear

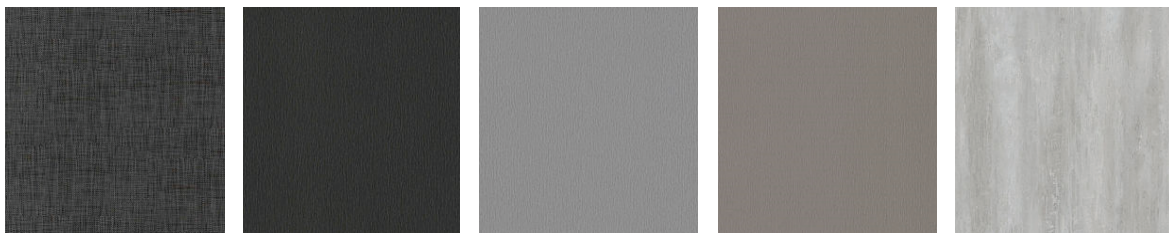

WWW.HEROFLOORING.COM
SUPERMAN@HEROFLOORING.COM
 702.600.8043